

**MECHANICAL APPOINTMENTS TO AVOID CORD LOSING
(STATEC PATENT)**

**POSSIBILITY TO LACE VERY IRREGULAR WINDING HEADS WITHOUT ANY
SETUP**

POSSIBILITY TO INVERT ROTATION SENSE FOR LACING

LACING AND AUTOMATIC KNOTTING WITHOUT REJECT CORDS

NO SETUP OF MECHANICAL APPOINTMENTS

**COMPLETE ELECTRICAL MOVEMENTS WITH SERVO AXIS OF ELECTRICAL
CAMMES**

**EASY CHANGEOVER STACK HEIGHT WITH ONE MOVEMENT
(AUTOMATIC OR MANUAL)**



PLC/PC FOR MANAGE RECIPES EQUIPPED WITH UPS CONDENSATORS

POSSIBILITY TO PROGRAM SLOT JUMPS AND DOUBLE POINTS

COMPLETE PROGRAMMING WITH 15" TOUCH PANEL

WIDE RANGE OF STACK HEIGHT/WINDING STATOR HEADS

**POSSIBILITY TO MOVE SERVO AXIS WITH DOORS OPEN WITH SAFETY
SPEED CERTIFIED**

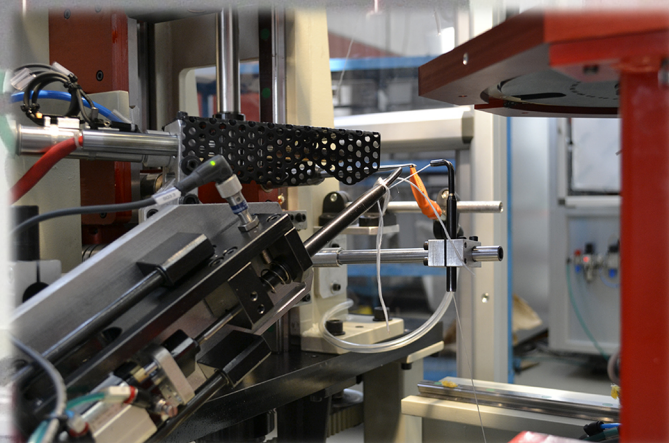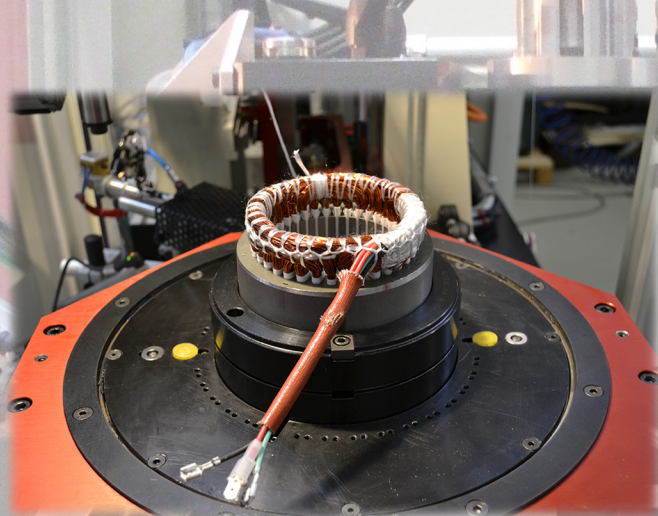

INTERNAL DIAMETER

FROM 32 TO 130 (MM)

EXTERNAL DIAMETER

200 (MM)

STACK HEIGHT

FROM 25 TO 200 (MM)

COIL HEIGHT

FROM 20 TO 50 (MM)

CHANGEOVER TIME STACK HEIGHT 30 SEC.


CHANGEOVER TIME COIL HEIGHT 15 SEC.

CHANGEOVER TIME TOOLING

5 MIN.

LACING SPEED

140 PTS/MIN

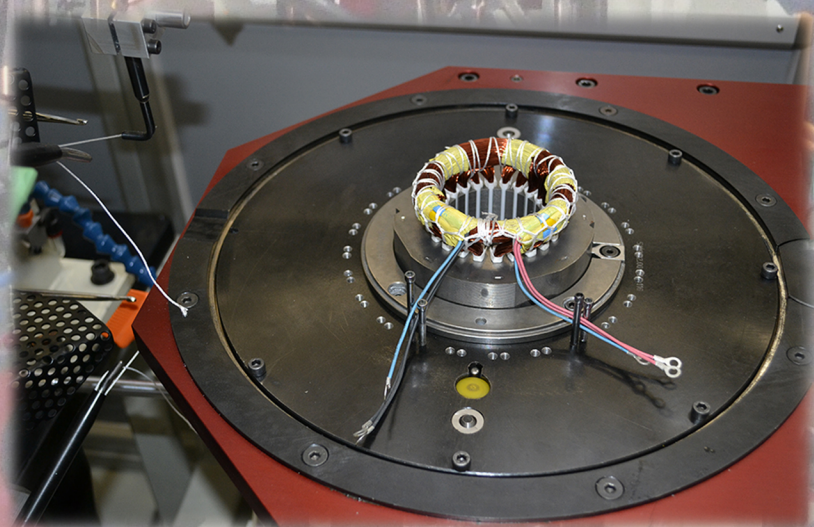

STATEC S.R.L.
ELMOTEC STATOMAT GROUP

VIA INDIPENDENZA 9/H - 10095 GRUGLIASCO - TORINO - ITALY
PHONE: +39 011.780.17.02 - 011.780.84.83 - FAX: 011.408.50.65
INFO@STATEC.IT - WWW.STATEC.IT